

3 in. Character Size Identification Tags

POLY TAGS TWO COLOR INJECTION MOLDED

MATERIAL

High impact polyolefin with excellent cold impact resistance. UV stabilizers and antioxidants added to provide complete protection and weather resistance in all climates.

SEE LIST ON
REVERSE FOR
STOCK SYMBOLS


ITEM CODE

EL3XXxxx


X=Y for Yellow background (standard)
X=K for Black copy (standard)
X=O for Orange background
xxx=Copy code (see list on reverse)

SPECIFY AS

2.5 in. x 3.5 in. x 0.13 in. thick tags with injection molded characters integral with locking grids. Color additives and UV stabilizers molded throughout the tags. Both copy and background have a minimum thickness of 0.040 in. (1 mm).

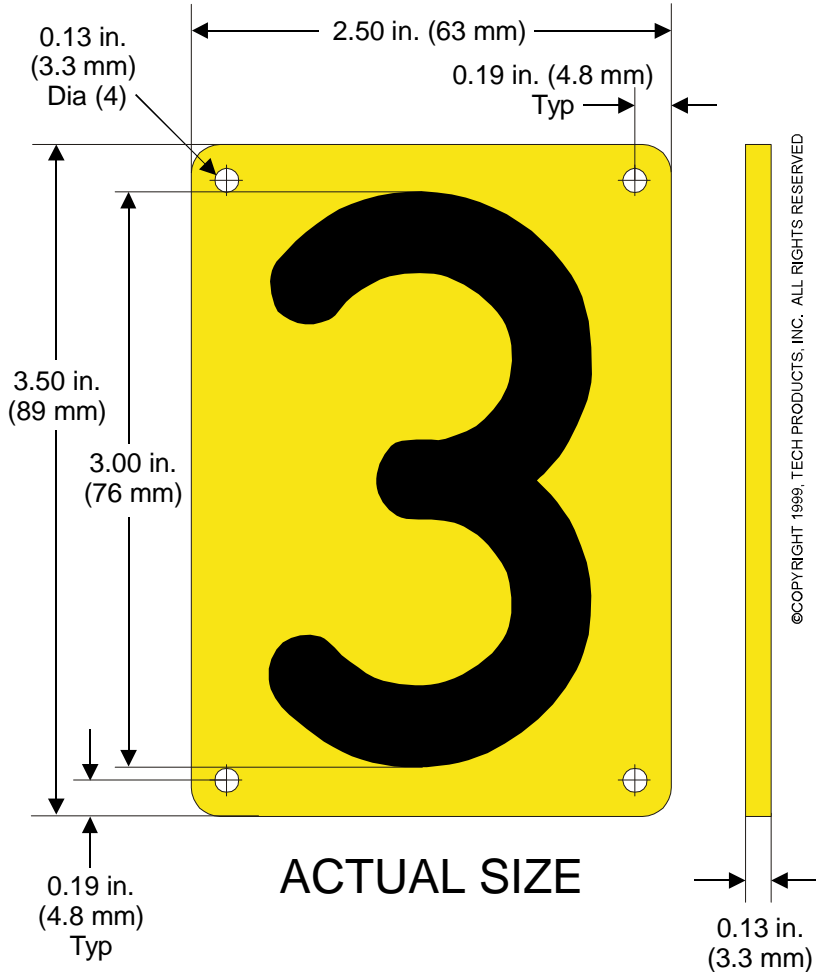

First Shot

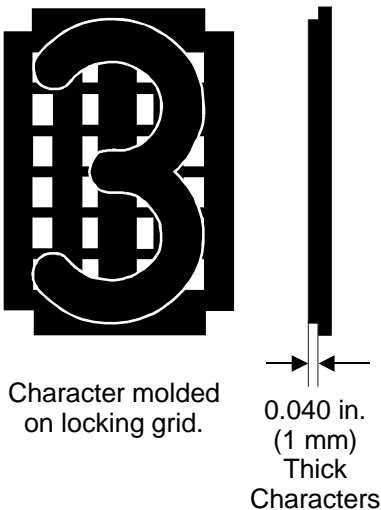

Second Shot Molding Process



Second shot resin locks with the first shot grid. Both background and characters have a minimum thickness of 0.040 in. (1 mm)

INSTALLATION GUIDELINES

Same tags can be used for both horizontally and vertically oriented installations by using either vertical or horizontal tag holders.

Holders are available in aluminum, (Spec Sheet **SPECAH3**) or, for applications where non-conductivity is of importance, in polyethylene (Spec Sheet **SPECPH3**).

TECH
PRODUCTS, INC.

Tel: (800) 221-1311 or (718) 442-4900 or Fax: (718) 442-2124

e-mail: team@techproducts.com

Visit us at: www.techproducts.com

SPEC3EVL
09/04

Item Codes for 3 in. Character Size **EVERLAST**[®] Tags

Copy	Item Code
1	EL3XX001
2	EL3XX002
3	EL3XX003
4	EL3XX004
5	EL3XX005
6 or 9	EL3XX006
7	EL3XX007
8	EL3XX008
0	EL3XX010
A	EL3XXA
B	EL3XXB
C	EL3XXC
D	EL3XXD
E	EL3XXE
F	EL3XXF
G	EL3XXG
H	EL3XXH
I	EL3XXI
J	EL3XXJ
K	EL3XXK
L	EL3XXL
M	EL3XXM
N	EL3XXN
O (Same as zero)	EL3XX010
P	EL3XXP
Q	EL3XXQ
R	EL3XXR
S	EL3XXS
T	EL3XXT
U	EL3XXU
V	EL3XXV
W	EL3XXW
X	EL3XXX
Y	EL3XXY
Z	EL3XXZ

Copy	Item Code
[Blank]	EL3XX011
- [Dash]	EL3XX012
/ [Slash]	EL3XX013
∅ [Phase Mark]	EL3XX014
+ [Plus]	EL3XX015
= [Equal]	EL3XX016
. [Period]	EL3XX017
: [Colon]	EL3XX018
~ [Sinus Sign]	EL3XX019
[Left-Right Arrow]	EL3XX020
[Up-Down Arrow]	EL3XX021
⊥ [Ground Symbol]	EL3XX022
∅1 [Phase Marker]	EL3XX031
∅2 [Phase Marker]	EL3XX032
∅3 [Phase Marker]	EL3XX033

X=Y for Yellow Background
 X=O for Orange Background*

*Please call for availability
 of special characters with
 orange background (EL3Oxxx)